

# XTX-Heatsink

Heatsink for XTX Embedded Computer Modules

Intel Atom™ N270, AMD Embedded G-Series APU, AMD® Geode™ LX 800



## Other

|        |  |
|--------|--|
| Others | 12VH DC Fan Voltage :12 Vdc, 5500rpm (cable length 200mm, w/3 Pin, Pitch:2.54mm connector) |
|--------|--|

## Material

|          |          |
|----------|----------|
| Material | Aluminum |
|----------|----------|

## Heatsink

|          |                           |
|----------|---------------------------|
| Heatsink | 114(W) x 96(D) x 12(H) mm |
|----------|---------------------------|

## Headquarter

10F-3, No.270, Sec.4,  
Chung Hsiao E.Rd.,  
Taipei, 10694, Taiwan

T +886 2 2751-7192  
E-mail: info@efco.com.tw

## EMEA

T +49-991-2009298-0  
E-mail: info@efcotec.com


## America

T +1-760-827-8600  
E-mail: sales-us@efcotec.com



Note : All product specifications are subject to change without notice

# XTX-Heatsink

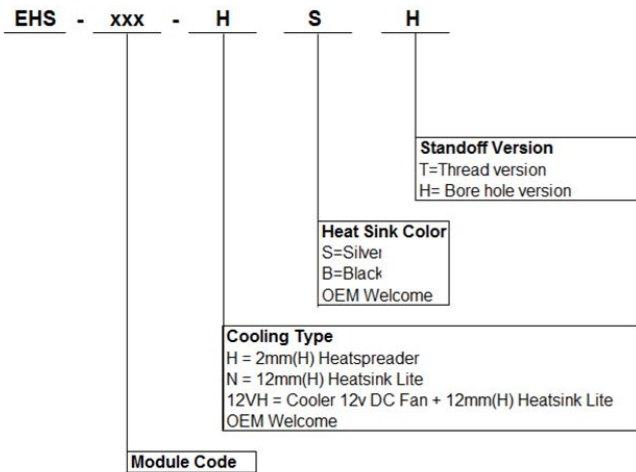

## Headquarter

10F-3, No.270, Sec.4,  
Chung Hsiao E, Rd.,  
Taipei, 10694, Taiwan

T +886 2 2751-7192  
E-mail: info@efco.com.tw

## EMEA

T +49-991-2009298-0  
E-mail: info@efcotec.com

## America

T +1-760-827-8600  
E-mail: sales-us@efcotec.com

